


StoQuik™ Silver NEXt Downspout Attachment over Wood Frame

Detail No.: 11.74a

Date: November 2007

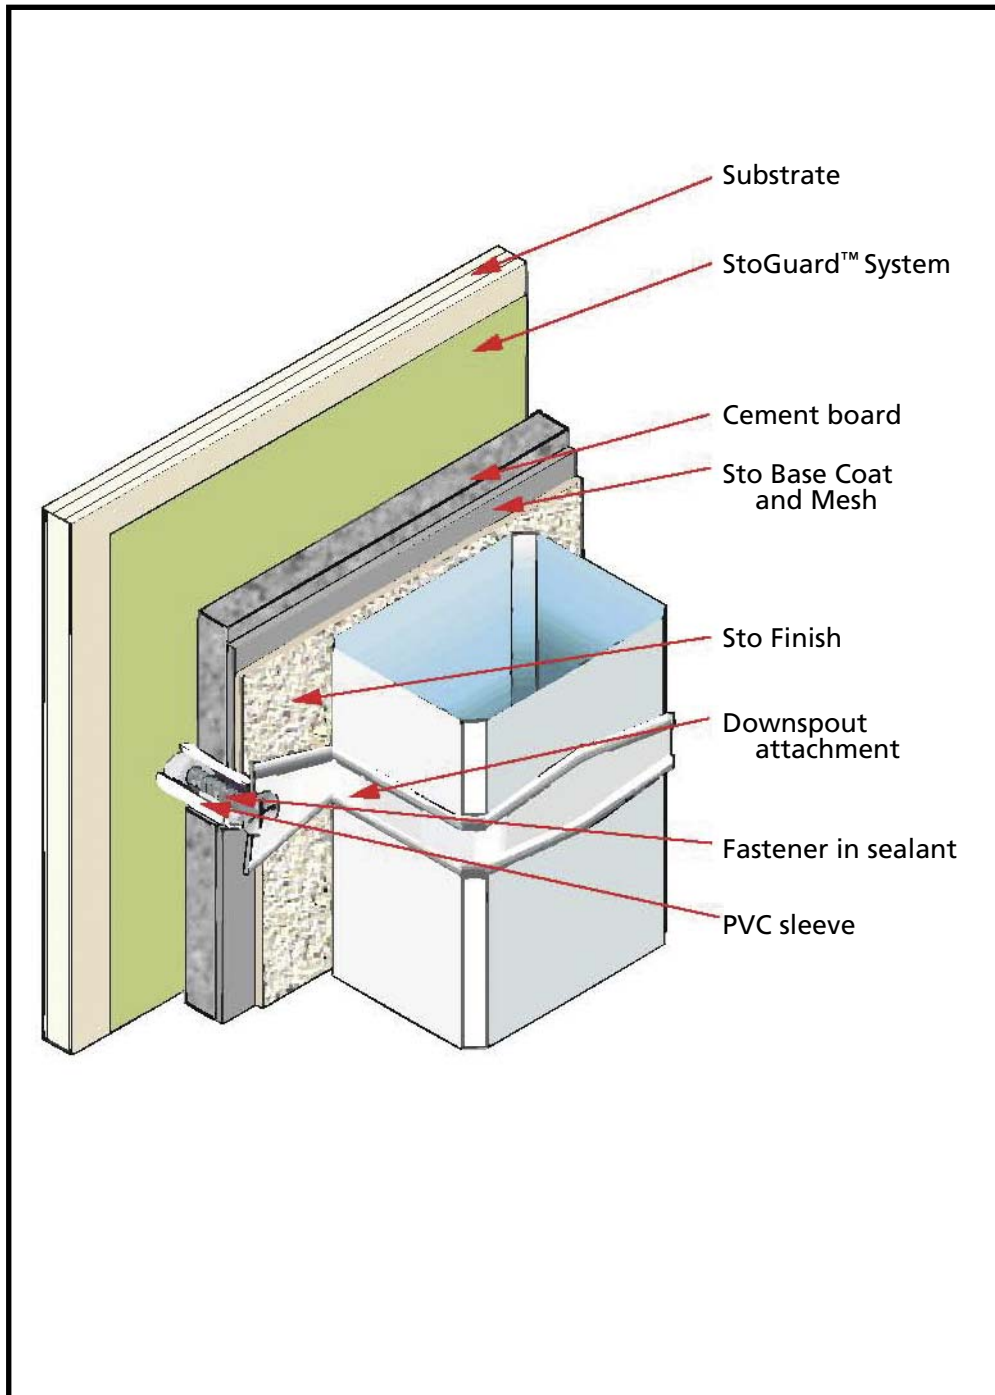

Notes:

1. Mark the location of the fastener on the finish.
2. Drill hole through StoQuik Silver System to sheathing.
3. Line hole with sealant and insert PVC sleeve 1/8" (3 mm) longer than the thickness of the StoQuik Silver System. Tool the excess sealant around the PVC sleeve.
4. Fill the PVC sleeve with sealant and immediately fasten downspout strap with screw through the wet sealant into the substrate. Tool sealant around screw head and remove excess.
5. Building codes vary with respect to the type of water-resistive barrier and the number of layers required over wood-based sheathing. Check the applicable code requirement to ensure compliance.
6. Refer to Sto Specification QS 200E for complete information on design requirements, installation and accessories.

ATTENTION

Sto products are intended for use by qualified professional contractors, not consumers, as a component of a larger construction assembly as specified by a qualified design professional, general contractor or builder. They should be installed in accordance with those specifications and Sto's instructions. Sto Corp. disclaims all, and assumes no, liability for on-site inspections, for its products applied improperly, or by unqualified persons or entities, or as part of an improperly designed or constructed building, for the nonperformance of adjacent building components or assemblies, or for other construction activities beyond Sto's control. Improper use of Sto products or use as part of an improperly designed or constructed larger assembly or building may result in serious damage to Sto products, and to the structure of the building or its components. **STO CORP. DISCLAIMS ALL WARRANTIES EXPRESSED OR IMPLIED EXCEPT FOR EXPLICIT LIMITED WRITTEN WARRANTIES ISSUED TO AND ACCEPTED BY BUILDING OWNERS IN ACCORDANCE WITH STO'S WARRANTY PROGRAMS WHICH ARE SUBJECT TO CHANGE FROM TIME TO TIME.** For the fullest, most current information on proper application, clean-up, mixing and other specifications and warranties, cautions and disclaimers, please refer to the Sto Corp. website, www.stocorp.com.

www.stocorp.com